

Wyse

Dell Wyse T class

The new standard for powerful,
economical thin clients.



Dell Wyse T class:
All you need to know. Here:



Introducing the Dell Wyse T class

The new standard for entry level.

Great to use. Great to manage

Dell Wyse T class thin clients deliver an exceptional Citrix, Microsoft, and VMware VDI user experience with unparalleled security, ease of use, and ease of management – on a budget. Two products are available: the Dell Wyse T10 with Dell Wyse ThinOS, and the Dell Wyse T50 with Dell Wyse enhanced Ubuntu™ Linux.

Users will find them easy to live with too, enjoying vibrant multimedia and Flash that plays in VDI, the power of their Marvell ARMADA™ PXA 510 v7 1.0 GHz System-on-Chip (SoC) processors and the hands-off support provided by Dell Wyse Automated Management capability.



Dell Wyse T10

Features Dell Wyse ThinOS for fastest performance with instant-on start up, easy centralized configuration, total security and an exceptional entry-level client for Citrix XenDesktop, VMware View, and Microsoft Remote Desktop Services (RDS).



Dell Wyse T50

Features a fast and simple user interface, a Chromium web browser and the strong security of Dell Wyse enhanced Linux, as well as browser-based connectivity to SAAS-based apps, and local execution via a VPN.



Start

Models

Features

Technical

Contact

Print

Features Dell Wyse T class

The best user experience. On a budget.

Dell Wyse T class thin clients are compact, affordable and flexible entry level thin clients. They deliver the best Web, Citrix, Microsoft and VMware VDI user experience and performance to IT executives needing to equip their task workers with an enterprise standard client on a budget. Dell Wyse T class thin clients deliver this with an array of features found across the premium range of Dell Wyse cloud clients.

Performance



Connectivity




Mounting options



Green



T10: Dell Wyse ThinOS



T50: Dell Wyse enhanced Ubuntu™ Linux



Thin client Management



User Experience Optimization



User Experience Acceleration



Take a tour of the Dell Wyse T class range



Start

Models

Features

Technical

Contact

Print

Performance

No compromise performance boost.

The Dell Wyse T class features a Marvell ARMADA™ PXA 510 v7 1.0 GHz system-on-chip (SoC) delivering better performance than the older 1.2GHz technology, over remote protocols like RDP.

Coupled with its built-in hardware media processor the Dell Wyse T class delivers smooth multimedia, bi-directional audio and Flash playback performance.

**ARMADA
v7**

Dell Wyse T class processor

Dell Wyse T class features an ARMADA™ PXA 510 v7 1.0 GHz SoC and is ready to work in under 20 seconds (under 5 seconds on the T10).



Continue tour



Start

Models

Features

Technical

Contact

Print

Connectivity

Dell Wyse T class standard configuration, connects right out of the box.

Unlike other entry level budget clients, Dell Wyse T class thin clients arrive ready to connect to a huge array of environments including web based applications and services and work seamlessly within Citrix, Microsoft and VMware environments. Users can enjoy two monitors using the DVI-I display option and high speed networking with support for Gigabit Ethernet and optional integrated b/g/n WiFi.



Front of device

SD card slot
(T50 only)

2 USB 2.0 ports

Output: 1/8-inch mini jack

Input: 1/8-inch mini jack,
8 bit stereo microphone

RJ45 (10/100/1000Mbps)
network port

Kensington
lock slot

* T10 does not currently
support "N" wireless band.

Optional 802.11
b/g/n* Wireless

2 USB 2.0 ports

DVI-I port



Continue tour



Start

Models

Features

Technical

Contact

Print

Mounting options

The Dell Wyse T class family can be placed horizontally or vertically (with optional feet) on desktops, mounted to walls and even behind monitors.



Back of monitor or wall mounting

The included horizontal stand enables mounting to the rear of a monitor (this requires the four industry standard mounting points to be free). The same bracket can be used for wall mounting.



Start

Models

Features

Technical

Contact

Print

Continue tour



Desktop computing Without compromise



EarthSmart Computing™



That's Dell Wyse EarthSmart™ computing

Through our EarthSmart Computing initiative we are committed to helping organizations implement a greener computing strategy – one that delivers a more efficient and productive computing experience for your users with a positive effect on energy wastage, heat and carbon emissions.

Green power

The Dell Wyse Xenith family packs a considerable punch with their green credentials. From reduced manufacturing impact and end-of-life recycling waste, to as little as 7 watts energy consumption, deploying Dell Wyse Xenith zero clients will enable your organization to achieve a lighter carbon footprint.

More information

Download carbon calculators, fact sheets and white papers from here:
www.wyse.com/green



Continue tour



Start

Models

Features

Technical

Contact

Print

wyse.com

Operating Systems Dell Wyse ThinOS 7.1

Dell Wyse ThinOS is the most secure, management-free solution for cloud and virtual computing environments with built-in support for the latest infrastructures including Citrix, Microsoft, VMware and other vendors.

Fast. Simple. Secure.

This fast, purpose-built thin computing platform boots up in seconds, updates itself automatically, and provides IT managers with simple, scalable administration to suit their organization's needs. Security is assured too as there's no published API – giving you an environment that's immune from viruses and malware.

Management is simple with time consuming tasks such as software and configuration updates automated via central file servers (ftp, http, and https) where Dell Wyse thin clients can check-in for their updates. So, whether you have 100, 1000, or 10,000 devices, rolling out a new update is as easy as dropping a file onto your file server.

New Zero Launchpad optimizes virtual desktop deployments

By harnessing the power of the Dell Wyse Zero engine, Dell Wyse ThinOS delivers fast and secure virtual desktops with user experiences based upon an individual's access levels.

Logging on is fast and easy too with no double desktop dramas. There's just one screen for inputting credentials before users are immediately presented with their assigned desktop(s). Finally, the Dell Wyse Zero toolbar gives advanced users the option to switch between multiple virtual desktops or modify local settings (e.g. display resolution) – all without leaving their virtual desktop environment.

Innovative, user-oriented and productive features

Instant-on, simple access for users

- The Zero launchpad and Zero toolbar adapt to provide simple and advanced access depending on user privileges.
- With class-leading boot-up times, users are ready to login in seconds.

Automated Management

- Dell Wyse ThinOS enables simple, scalable device management from day one without the need for complex management software.
- For enterprise management Dell Wyse ThinOS features complete integration with Dell Wyse Device Manager.

Security

- Featuring an unpublished API and no local file system, Dell Wyse ThinOS is inherently secure providing maximum security against malware and viruses.
- Secure remote access using Citrix Access Gateway (CSGEE mode) or VMware Security Server, including dual factor authentication with RSA SecureID.

Industry best HDX, View, and RDP in a non-windows client

- Support for latest HDX features including ICA UDP audio, accelerated multimedia playback, USB webcam remoting, new audio codecs for VoIP, dual factor authentication, etc.
- Dell Wyse is the only vendor with an RDP 7.1 compatible client on non-windows OS – other vendors use RDESKTOP (based on RDP 6.x)
- ICA and RDP performance outperforms other non-windows clients by 3x (on comparable hardware).
- Enhance existing protocols further with Dell Wyse TCX (i.e. multicasting, high latency optimization, USB redirection into terminal server, etc)

[Continue tour](#)



Start

Models

Features

Technical

Contact

Print

Operating Systems Dell Wyse enhanced Ubuntu Linux*

Dell Wyse enhanced Ubuntu Linux is a simple, secure, and easy to manage platform designed for customers looking for flexibility and support of the latest protocols (ICA, RDP, etc) without the need for a Windows-based thin client.

Simple "Hands-Off" Management

Deploying, managing, and updating Dell Wyse enhanced Ubuntu Linux is easier than any other thin-Linux distribution, Period. Utilizing Dell Wyse's proven automatic update and configuration approach, management tasks can be handled centrally and easily without any management software required.

Updating 1 or 1,000 thin clients is as simple as dragging and dropping a file into a folder. For customers that desire a little more hands-on approach (such as asset tracking, reporting, etc) then integration with Dell Wyse Device Manager is built-in.

Security

Dell Wyse enhanced Ubuntu Linux is designed with security in mind. IT managers are able to provide a locked-down experience, smartcard login to virtual environments, VPN connectivity, and leverage a read-only file system that protects against data loss, theft and virus attacks.



Enterprise-quality Linux optimized by Dell Wyse

Dell Wyse enhanced Ubuntu Linux is the only enterprise-quality Linux platform optimized for thin computing, created by combining the security and flexibility of Ubuntu Linux with Dell Wyse's cloud client computing leadership and innovation in user experience and simplified management.

Flexible, Multi-Protocol Support

Being built from a standard enterprise-quality Linux distribution means the Dell Wyse enhanced Ubuntu Linux supports a wide range of protocols and infrastructures straight-out-of-the-box including Citrix, Microsoft and VMware – allowing you to mix-and-match connections from a single image.

That's Dell Wyse enhanced Ubuntu Linux

The only enterprise-quality Linux platform optimized by Dell Wyse for thin client computing.

*Ubuntu™ is a registered trade mark of Canonical Group Limited

Continue tour



Start

Models

Features

Technical

Contact

Print

wyse.com

Thin Client Management Dell Wyse Device Manager

Dell Wyse Device Manager (WDM) addresses key management requirements for deploying powerful thin clients. With its centralized management and administration WDM helps IT departments deliver more effective remote thin client support while minimizing end user downtime.

Security is assured with HTTPS based imaging, updates and downloads.

WDM delivers organization-wide benefits:

Operations	Centralized management. Collect and organize asset information.
Administration	Health status reports. Automated client settings. Update client firmware and add applications.
End User IT Costs	Easier more effective remote support. Create custom scripts and packages.
Minimize downtime	Restart or reset thin clients in less than a minute. Enforce policies. Minimize user errors.



Dell
Wyse
WDM

At a glance features

- **Security**
HTTPS Based Imaging / Updates
Fully Encrypted Network Traffic
Delegated Admin Access (MS AD) Support
- **No-Hassle Deployment**
Complete Device Imaging / Patching / Updates
Bandwidth Throttling for Efficiency / Reliability
Software Updates and Add-ons
- **Device Administration and Monitoring**
Device Health Status / Reporting
Remote Shadowing / Control
Default Device Configuration
- **Reduce End User IT Costs**
Reduce energy consumption with scheduled up/down times
- **Scalability**
Distributed Architecture
Microsoft SQL Database Support
Multiple Remote Repository Support
- **Complete Asset Visibility**
Automated device discovery
Detailed Hardware Asset information
Installed Software Asset information

Continue tour



Start

Models

Features

Technical

Contact

Print

User Experience Optimization Dell Wyse TCX Suite

with Collaborative Processing Architecture

Dell Wyse TCX delivers an amazing user experience in one software suite

Dell Wyse TCX Suite of virtualization software enriches the user experience by removing the limitations previously associated with thin clients. It enhances, not replaces, key protocols like ICA/HDX and RDP by adding key features to make each more valuable.



Multi-display


Ensures application windows and dialog boxes are multi-monitor aware when using more than one monitor.



USB Virtualization

Enables plug and play peripheral support for virtual desktop environments.

- Redirect and use local USB devices in virtual desktops.
- Deploy virtual desktops to knowledge workers with special device access needs.
- Enable a broad set of USB peripherals including webcams and headsets.



Multimedia acceleration

Streamlines the delivery of video and audio content to the local client for a rich user experience within a thin client computing architecture.

- Accelerates Mpeg1, Mpeg2, WMV, Mpeg4 Part 2, AC3, AAC, MP3, WAV, WMA media types.
- Collaborative Processing Architecture enhances server scalability, and network utilization by off-loading multimedia rendering to the client.



Flash acceleration

Flash acceleration helps thin client users to experience improved Flash video performance. While the Flash player continues to run server-side, the resulting images are transcoded and redirected to the client for fast rendering. The technology allows for greater control of frame rate and compression and supports enhanced playback of YouTube-style flash videos in Internet Explorer.



Bi-directional sound

Enables bi-directional audio in virtual desktop environments, enabling solutions such as VOIP, digital dictation or voice recognition to be deployed.

[Continue tour](#)



Start

Models

Features

Technical

Contact

Print

Virtualization Software Dell Wyse VDA

Removing the barriers of network latency.

Dell Wyse Virtual Desktop Accelerator (VDA) enables virtualized desktop and thin computing environments to be deployed to areas where network latency has, to date, presented operational barriers. Now, with Dell Wyse VDA, more users can receive the full benefits of Dell Wyse thin computing – with the best PC experience over virtualized desktops.

Dell Wyse VDA is a software-only solution for Dell Wyse thin clients and supported PCs that delivers the best user experience for the allocated network bandwidth by neutralizing the effects of network latency and packet loss. Making 'thin' suitable for more remote-site, branch, or field-based users.

Dell Wyse VDA works with instead of replacing existing RDP and ICA protocols, accelerating them by up to 20 times on networks faced with latencies up to and beyond 300ms, and at least 768kbps bandwidth.



At a glance features

- Software-only acceleration of virtual desktops and applications
- Accelerates existing Citrix ICA and Microsoft RDP protocols
- Works on WANs and 'fat, long pipes'
- Accelerates connections to Citrix XenApp, Citrix XenDesktop, VMware View and Microsoft Terminal Server and Microsoft Hyper-V VDI
- Enhances Dell Wyse TCX software suite functionality across wide-area networks
- Enables Dell Wyse Collaborative Processing Architecture across wide-area networks
- Administrator console provides control of maximum bandwidth per connection
- Leverages built-in security of underlying protocols (128-bit encryption for RDP and ICA).

Continue tour



Start

Models

Features

Technical

Contact

Print


Technical Dell Wyse T class specifications

The Dell Wyse T class is configured to work with Dell Wyse ThinOS™ and Dell Wyse enhanced Ubuntu™ Linux operating systems.

Want to learn more? Simply click the relevant icon.



Dell Wyse T class
hardware specifications

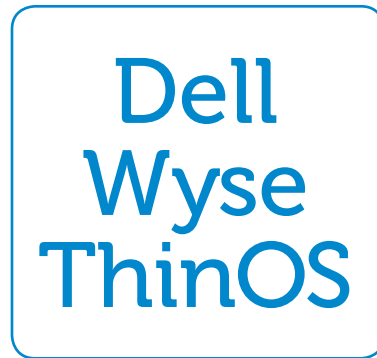

Dell Wyse T10
software specifications



Dell Wyse T50
software specifications



Start

Models

Features

Technical

Contact

Print

Specifications

Processors	Dell Wyse T10 and T50: Marvell ARMADATM PXA 510 v7 1.0 GHz system-on-chip (SoC)
Memory	T10 0GB Flash / 1GB RAM DDR3 T50 1GB Flash / 1GB RAM DDR3
I/O peripheral support	Four USB 2.0 ports One DVI-I port, DVI to VGA (DB-15) adapter included Dual display support with optional DVI-I to DVI-D plus VGA-monitor splitter cable (sold separately) SD Card Slot (T50 only) Enhanced USB Keyboard with Windows Keys (104 keys) and PS/2 mouse port PS/2 Optical mouse included
Multimedia decoding	H.264, WMV9/VC1 Up to 720p local browser Flash support (T50 only)
Networking	RJ45 (10/100/1000Mbps) Factory options: Optional 802.11 b/g/n* wireless support: WPA Personal, WPA2 Personal, WPA Enterprise, WPA2 Enterprise, WPA Enterprise Authentication support.
Display	Single: Up To 1920x1200@24bpp Dual: Up To 1920x1080@24bpp Hardware accelerated Monitor rotation support (L-Shaped Dual Monitors)**
Audio	Output: 1/8-inch mini jack Input: 1/8-inch mini jack, 8 bit stereo microphone

Mountings	Stand for horizontal use and VESA/Wall mounting (included) or vertical feet (optional)
Device Security	Built-in Kensington security slot (cable sold separately)
Physical characteristics	Height: 1 inch (25mm) Width: 6.9 inches (177mm) Depth: 4.69 inches (119mm)
Shipping Weight	1.003 lbs (.455kg)
Power	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 Phase V external and EuP compliant power adapter Average power usage with device connected to 1 keyboard with 1 PS/2 mouse and 1 monitor: Under 7.2 watts
Temperature Range	Operating: 32° to 104° F (10° to 40° C), horizontal and vertical positions Storage : 14° to 140° F (-10° to 60° C)
Humidity	20% to 80% condensing 10% to 95% non-condensing
Safety certifications	German EKI-ITB 2000, ISO 9241-3/-8 cULus 60950, TÜV-GS, EN 60950 FCC Class B, CE, C-Tick WEEE, RoHS Compliant
Warranty	3 years limited hardware warranty



Start

Models

Features

Technical

Contact

Print

Software specifications Dell Wyse ThinOS 7.1

HDX Ready client ICA 12 Compatible	<ul style="list-style-type: none"> - UDP Audio - Improved media flow control - HDX Plug-n-Play - Flash (server rendered) - Progressive Display - HDX IntelliCache - Session Reliability - Access Gateway Support (direct LDAP or RSA authentication) - Support for L-shaped desktop (and other rotated monitor set up) - Granular control on HDX USB redirected devices 	<ul style="list-style-type: none"> - User roaming - HDX Mediastream - HDX Realtime - HDX Broadcast (Branch Repeater) - Seamless Windows - Desktop Restart (XenDesktop) - Smartcard authentication & redirection 	Dell Wyse TCX Suite Dell Wyse TCX Suite virtualization software works with and enhances HDX and RDP protocols featuring: <ul style="list-style-type: none"> - Multimedia: giving users the power to run rich multimedia files formats - Multi-Display: windows and dialog boxes behave the way users expect across multiple displays. - USB Virtualizer: client attached USB devices are visible to virtual desktops applications, and administrators, even on terminal servers! - Rich Sound – receive and transmit high quality audio without compromise. - Flash Acceleration: helps users to experience improved Flash performance.
RDP 7.1 Compatible client	<ul style="list-style-type: none"> - Optimized for Windows 7 - Rich Multimedia (TS MMR) - Up to 32-bit color depth connections - RDP7 Bi-directional audio - Flash Video support (with TCX) - Broad USB Support (with Dell Wyse TCX) - Smartcard authentication and redirection - WAN Acceleration (with Dell Wyse VDA) 	<ul style="list-style-type: none"> - Support for Microsoft RDS broker (including RemoteApp) - RDP7 Multimedia - True Multi-Monitor Support (incl. rotation) - Network Level Authentication (NLA) 	Dell Wyse Virtual Desktop Accelerator Neutralizes the effects of network latency and packet loss, making 'thin' more suitable for more remote-site, branch, or field-based users by boosting RDP and ICA performance up to 20 times on networks with latencies up to and exceeding 300ms and at least 768kbps bandwidth.
VMware View 4.5 client	<ul style="list-style-type: none"> - Smartcard Authentication - SecureID Authentication - Multimedia Support (with TCX) - Bi-directional Audio (with TCX) - WAN Acceleration (with VDA) 	<ul style="list-style-type: none"> - SSL Tunneling - Restart VM - Broad USB Support (with TCX) - Flash Video Support (with TCX) 	Management made easy Fast booting, scalable administration includes simple drag and drop placement of firmware, automatic updates via file server and full integration with Dell Wyse Device Manager.
Roaming smart card vendor support	Enables smart card users to not only roam from station to station but also access the same virtual environment regardless of which station they are connecting from. Dell Wyse ThinOS provides 'out-of-the-box' smart card support for vendors such as Gemalto .NET, Aladdin, and ActiveIdentity – supported within Citrix, VMware and Microsoft environments. Users benefit from secure login and roaming desktop support so they can access their environments from any suitably equipped Dell Wyse thin computing environment. DoD CAC supported.		
			Security built in <ul style="list-style-type: none"> - With no published API Dell Wyse ThinOS is inherently secure from viruses and malware. - Dell Wyse ThinOS includes robust wired and wireless 802.1x support, with secure encryption for simple installation and management. - DoD CAC supported. - Although there is no local file system, certifications and configuration data can be stored locally. Leveraging AES 128 bit encryption, with a random number generator, any local data will be secure.
			Server OS Infrastructure support <ul style="list-style-type: none"> - Citrix XenDesktop 4.0 – 5.5 - Citrix XenApp 4.5 – 6.5 - Citrix Presentation Server - Microsoft Windows Terminal Server 2003 & 2008/R2 - VMware View 4.0 – 5.0 - Support for other leading VDI brokers (Quest Software, Leostream, etc)



Software specifications Dell Wyse enhanced Ubuntu Linux*

Firmware features	Dell Wyse Enhanced Ubuntu* Linux Simple Recovery (Factory settings) Chromium local browser Flash capable Dell Wyse RDP Client (RDP 7 compatible) Citrix HDX 12.0 (HDX Ready certified) VMWare View Open client compatible with View 4.5 (RDP) Dell Wyse TCX compatible
HDX Ready client ICA 12.0 compatible	<ul style="list-style-type: none"> - UDP Audio - Improved media flow control - HDX Plug-n-Play - Flash (server rendered) - Progressive Display - HDX IntelliCache - Session Reliability - Access Gateway Support (direct LDAP or RSA authentication) - Support for L-shaped desktop (and other rotated monitor set up) - Granular control on HDX USB redirected devices - User roaming - HDX Mediastream - HDX Realtime - HDX Broadcast (Branch Repeater) - Seamless Windows - Desktop Restart (XenDesktop) - Smartcard authentication & redirection
RDP 7 compatible client	<ul style="list-style-type: none"> - Optimized for Windows 7 - Rich Multimedia (TS MMR) - Up to 32-bit color depth connections - RDP7 Bi-directional audio - Flash Video support (with TCX) - Broad USB Support (with Dell Wyse TCX) - Smartcard authentication and redirection - WAN Acceleration (with Dell Wyse VDA) - Support for Microsoft RDS broker (including RemoteApp) - RDP7 Multimedia - True Multi-Monitor Support (incl. rotation) - Network Level Authentication (NLA)

Dell Wyse TCX Suite	Dell Wyse TCX Suite virtualization software works with and enhances HDX and RDP protocols featuring: <ul style="list-style-type: none"> - Multimedia: giving users the power to run rich multimedia files formats - Multi-Display: windows and dialog boxes behave the way users expect across multiple displays. - USB Virtualizer: client attached USB devices are visible to virtual desktops applications, and administrators, even on terminal servers! - Rich Sound - receive and transmit high quality audio without compromise. - Flash Acceleration: helps users to experience improved Flash performance.
Management made easy	Fast booting, scalable administration includes simple drag and drop placement of firmware, automatic updates via file server and full integration with Dell Wyse Device Manager.
Server OS Infrastructure support	<ul style="list-style-type: none"> - Citrix XenDesktop 4.0–5.5 - Citrix XenApp 4.5–6.5 - Citrix Presentation Server - Microsoft Windows Terminal Server 2003 & 2008/R2 - VMware View 4.0–5.0 - Support for other leading VDI brokers (Quest Software, Leostream, etc.)
	*Ubuntu™ is a registered trade mark of Canonical Group Limited





Contact Dell Wyse

Dell Wyse

3471 North First Street,
San Jose,
CA 95134-1801

Visit our website at:

<http://www.wyse.com> or send
an email to: sales@wyse.com

Dell Wyse Sales

800 GET WYSE (800 438 9973)

International customers please dial:

00 1 408 473 1200

Dell Wyse Support Portal

Dell Wyse Support Portal provides a fast and accurate way to communicate interactively with Dell Wyse Customer Support, and helps us respond to your requests more quickly.

<http://support.wyse.com/selfservice.html>



Wyse

Dell Wyse offers cloud client computing sales, service and support expertise around the globe. Click for contact details.



About Dell

Dell Inc. (NASDAQ: DELL) listens to customers and delivers innovative technology and services that give them the power to do more.

For more information, visit www.dell.com



Start

Models

Features

Technical

Contact

Print

Dell Wyse T class

The best user experience on a budget

The Dell Wyse T class thin clients are compact, affordable and flexible entry level thin clients. They deliver the best web, Citrix, Microsoft and VMware VDI user experience and performance to IT executives needing to equip their task workers with an enterprise standard client on a budget. Dell Wyse T class thin clients deliver this with an array of features found across the premium range of Dell Wyse cloud clients.

Great to use, great to manage

Dell Wyse T class thin clients deliver an exceptional Citrix, Microsoft, and VMware VDI user experience with unparalleled security, ease of use, and ease of management – on a budget. Two operating systems are available: Dell Wyse ThinOS and Dell Wyse enhanced Linux. Users will find them easy to live with too, enjoying vibrant multimedia and Flash that plays in VDI, the power of their Marvell ARMADA™ PXA 510 v7 1.0 GHz system-on-chip (SoC) and the hands-off support provided by Dell Wyse Automated Management capability. All Dell Wyse T class thin clients are RDP 7 compatible – unique for entry level clients.

No compromise performance boost

The Dell Wyse T class features a Marvell ARMADA™ PXA 510 v7 1.0 GHz system-on-chip (SoC) delivering 150% better performance than the older 1.2GHz technology, over remote protocols like RDP.

Coupled with its built-in hardware media processor the Dell Wyse T class delivers smooth multimedia, bi-directional audio and Flash playback performance.

Connects right out of the box

Unlike other entry level budget clients, Dell Wyse T class thin clients arrive ready to connect to a huge array of environments including web based applications and services and work seamlessly within Citrix, Microsoft and VMware environments. Users can enjoy two monitors using the DVI-I display option and high speed networking with support for Gigabit Ethernet and optional integrated b/g/n WiFi.

Saves budget and saves the environment too

Dell Wyse T class thin clients deliver great value from day one and will keep on doing so with a lower TCO than other solutions. All while delivering vital green credentials with its ENERGY STAR Version 5.0 and EPEAT compliance.

At a glance

Performance

Dell Wyse T class features a Marvell ARMADA™ PXA 510 v7 1.0 GHz system-on-chip (SoC) delivering better performance than the older 1.2GHz technology, over remote protocols like RDP.

Operating systems

Two operating systems are available: Dell Wyse ThinOS (T10), and Dell Wyse enhanced Linux (T50)

Connectivity

DVI-I interface with optional splitter cable enabling use of 2 monitors. Four USB 2.0 ports, Gigabit Ethernet connectivity and optional WiFi 802.11 b/g/n* support.

Management

Features Dell Wyse auto-configuration and management software found on premium thin and zero clients. For customers that desire a little more hands-on approach (such as asset tracking, reporting, etc) then integration with Dell Wyse Device Manager is built-in.

Multimedia performance

Hardware accelerated video decoding for smooth multimedia VC1/WMV9, and H.264 playback.

Green

Energy Star Version 5.0 and EPEAT compliance.

* T10 does not currently support wireless "n".



The new standard for powerful, economical thin clients.

Specification

Dell Wyse T class thin clients

Processors	Dell Wyse T10 and T50: Marvell ARMADA™ PXA 510 v7 1.0 GHz system-on-chip (SoC)
Memory	T10 0GB Flash / 1GB RAM DDR3 T50 1GB Flash / 1GB RAM
I/O peripheral support	Four USB 2.0 ports One DVI-I port, DVI to VGA (DB-15) adapter included Dual display support with optional DVI-I to DVI-D plus VGA-monitor splitter cable (sold separately) SD Card Slot (T50 only) Enhanced USB Keyboard with Windows Keys (104 keys) and PS/2 mouse port PS/2 Optical mouse included
Multimedia decoding	H.264, WMV9/VC1 Up to 720p local browser Flash support (T50 only)
Networking	RJ45 (10/100/1000Mbps) Factory options: Optional 802.11 b/g/n* wireless support: WPA Personal, WPA2 Personal, WPA Enterprise, WPA2 Enterprise, WPA Enterprise Authentication support.
Display	Single: Up To 1920x1200@24bpp Dual: Up To 1920x1080@24bpp Hardware accelerated Monitor rotation support (L-Shaped Dual Monitors)**
Audio	Output: 1/8-inch mini jack Input: 1/8-inch mini jack, 8 bit stereo microphone
Mountings	Stand for horizontal use and VESA/Wall mounting (included) or vertical feet (optional)
Device Security	Built-in Kensington security slot (cable sold separately)
Physical characteristics	Height: 1 inch (25mm) Width: 6.9 inches (177mm) Depth: 4.69 inches (119mm)
Shipping Weight	1.003 lbs (.455kg)
Power	Worldwide auto-sensing 100-240 VAC, 50/60 Hz. Energy Star V5.0 Phase V external and EuP compliant power adapter Average power usage with device connected to 1 keyboard with 1 PS/2 mouse and 1 monitor: Under 7.2 watts
Temperature Range	Operating: 32° to 104° F (10° to 40° C), horizontal and vertical positions Storage : 14° to 140° F (-10° to 60° C)
Humidity	20% to 80% condensing 10% to 95% non-condensing
Safety Certifications	German EKI-ITB 2000, ISO 9241-3/-8 cULus 60950, TÜV-GS, EN 60950 FCC Class B, CE, VCCI, C-Tick WEEE, RoHS Compliant Energy Star & EPEAT compliant
Warranty	Three-year hardware warranty

* T10 does not currently support 'N' wireless band.
** Only supported on T10.



Learn more: Contact Dell Wyse at sales@wyse.com or call 1-800-GET-WYSE

wyse.com

Dell Wyse
3471 North First Street
San Jose, CA 95134-1801

Visit our website at:
<http://www.wyse.com>
Or send email to: sales@wyse.com

Dell Wyse Sales
800 GET WYSE
(800 438 9973)

Dell Wyse Customer Service Center:
800 800 WYSE (800 800 9973)

